
## AUDIO SOURCE SELECTION & LEVEL CONTROL Multiple Control Locations in a Multi-Purpose Meeting Room / Auditorium





## Description:

The multi-purpose room is provided with four different line-level audio sources. Users of the room are able to select their desired source and adjust the audio level from within the space. The RU-ASX4DR Remote Controlled Audio Selector with VCA is controlled by two D-RC4M Four Channel Remote Controls (source selectors) and two D-RLC10 Remote Level Controls (0 to 10 Vdc). Two control locations are shown; up to ten remote locations are possible. All sources may be muted by de-selecting the active input on either D-RC4M. The D-CIJ3D Consumer Interface Jack Panel is used for connection of a user-supplied audio source.

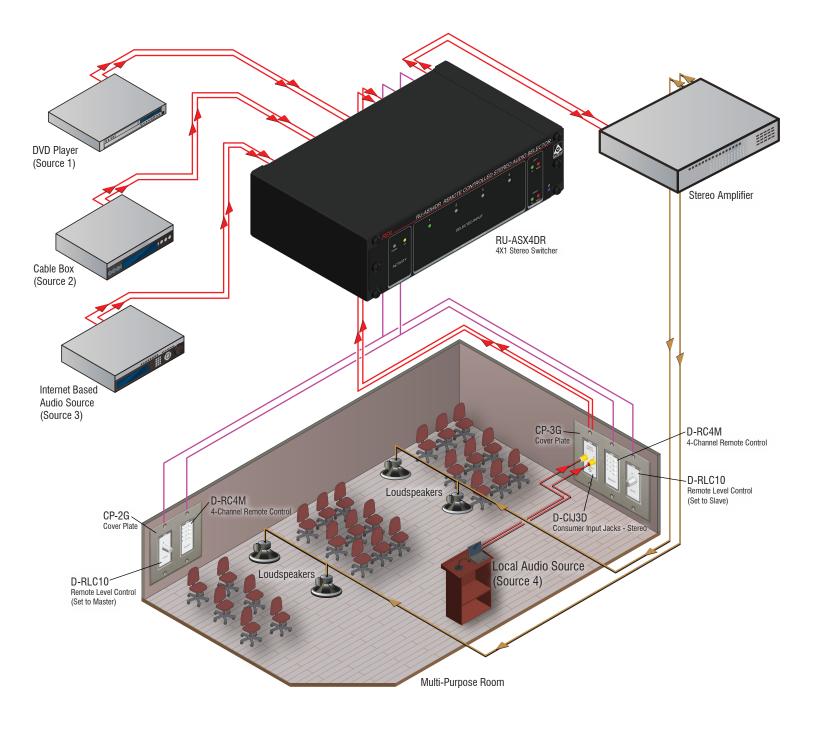

Parts Lis	
Product	QTY
CP-2G	1
CP-3G	1
D-CIJ3D	1
D-RC4M	2
D-RLC10	2
RU-ASX4DR	1

Recommended Pwr. Supplies Product OTY PS-24AS 24 Vdc 500 mA

